

Multipath Spanners

Cyril Gavoille^{1,*}, Quentin Godfroy^{1,*}, and Laurent Viennot^{2,**}

¹ University of Bordeaux, LaBRI
² INRIA, University Paris 7, LIAFA

Abstract. This paper concerns graph spanners that approximate multipaths between pair of vertices of an undirected graphs with n vertices. Classically, a spanner H of stretch s for a graph G is a spanning subgraph such that the distance in H between any two vertices is at most s times the distance in G . We study in this paper spanners that approximate short cycles, and more generally p edge-disjoint paths with $p > 1$, between any pair of vertices.

For every unweighted graph G , we construct a 2-multipath 3-spanner of $O(n^{3/2})$ edges. In other words, for any two vertices u, v of G , the length of the shortest cycle (with no edge replication) traversing u, v in the spanner is at most thrice the length of the shortest one in G . This construction is shown to be optimal in term of stretch and of size. In a second construction, we produce a 2-multipath $(2, 8)$ -spanner of $O(n^{3/2})$ edges, i.e., the length of the shortest cycle traversing any two vertices have length at most twice the shortest length in G plus eight. For arbitrary p , we observe that, for each integer $k \geq 1$, every weighted graph has a p -multipath $p(2k - 1)$ -spanner with $O(pn^{1+1/k})$ edges, leaving open the question whether, with similar size, the stretch of the spanner can be reduced to $2k - 1$ for all $p > 1$.

Keywords: spanner, multipath.

1 Introduction

This paper concerns the computation of sparse spanners for the multipath graph metric. We call *graph metric* a function δ that associates a metric δ_G with the vertex-set of a given graph G . A graph metric δ is *non-increasing* when distances can only decrease when adding edges. In other words, δ is non-increasing when $H \subseteq G$ implies $\delta_H \geq \delta_G$. (Here $H \subseteq G$ stands for H is a subgraph¹ of G , and $\delta_H \geq \delta_G$ stands for $\delta_H(u, v) \geq \delta_G(u, v)$ for all² u, v .) The *graph distance* d is the most classical graph metric: given an weighted undirected graph G , $d_G(u, v)$ is defined as the cost of a shortest path between u and v .

* Supported by the ANR-project “ALADDIN”, the équipe-projet INRIA “CÉPAGE”, and the French-Israeli “Multi-Computing” project. The first author is Member of the “Insitut Universitaire de France”.

** Supported by the ANR-project “ALADDIN”, and the équipe-projet INRIA “GANG”.

¹ I.e., $V(H) \subseteq V(G)$ and $E(H) \subseteq E(G)$.

² For convenience, we set $\delta_H(u, v) = \infty$ if u or v is not in $V(H)$.

The notion of spanner is usually defined for the graph distance but it can be formulated for any non-increasing graph metric δ : an f -spanner (for δ) of a graph G is a subgraph $H \subseteq G$ such that $\delta_H(u, v) \leq f(\delta_G(u, v))$ for all $u, v \in V(G)$ where f is a stretch function satisfying $f(d) \geq d$ for $d \geq 0$. As δ is non-increasing, H must satisfy $\delta_G(u, v) \leq \delta_H(u, v) \leq f(\delta_G(u, v))$ for all u, v . Intuitively, an f -spanner H approximates the distances of G using possibly fewer edges. A rich literature studies the trade-off between the sparsity of H and the tightness of the stretch function f .

In this paper, we focus on the notion of spanner for the multipath graph metric. Given an integral value $p \geq 1$, the p -multipath graph metric d^p is defined as follows: given a weighted undirected graph G , $d_G^p(u, v)$ is the minimum weight sum of the edges of a set of p edge-disjoint paths joining u and v in G . The value $d_G^p(u, v)$ can be determined in polynomial time by computing a minimum-cost flow³ of value p between source u and sink v . For $p = 1$, we fall back on the graph distance: $d_G^1(u, v) = d_G(u, v)$. This introduces a new notion of spanner that we call *multipath spanner*.

1.1 Motivation

Our interest to the multipath graph metric stems from the need for multipath routing in networks. Using multiple paths between a pair of nodes is an obvious way to aggregate bandwidth. Additionally, a classical approach to quickly overcome link failures consists in pre-computing fail-over paths which are link-wise disjoint from primary paths [18,23,22]. Multipath routing can be used for traffic load balancing and for minimizing delays [32,15]. Multipath routing has been extensively studied in ad hoc networks for load balancing, fault-tolerance, higher aggregate bandwidth, diversity coding, minimizing energy consumption (see [21] for a quick overview). Heuristics have been proposed to provide disjoint routes [22,19] in on-demand protocols. There is a wide variety of optimization requirements when using several paths between pairs of nodes. However, using edge-disjoint or vertex-disjoint paths is a recurrent concern in optimizing routing in networks. Using disjoint paths is a dissertation subject in itself [17] and has many problem variants.

Considering only a subset of links is a practical concern in link state routing in ad hoc networks [16]. This raises the problem of computing spanners for the multipath graph metric. As node mobility results in link failures, having an edge-disjoint multipath between two nodes reduces the probability of disconnection. Additionally, spanners are a key ingredient in the design of compact routing schemes [25,30]. Designing multipath spanners is thus a first step toward multipath compact routing.

Another reason for considering edge-disjoint paths rather than vertex-disjoint paths is that the resulting distance is a metric. This is not the case with vertex-disjoint paths. More specifically, if we define $d_G^{*p}(u, v)$ as the minimum cost of a

³ To avoid using an edge in both directions, we apply a standard reduction to digraphs: each undirected edge xy is replaced by the dipath $x \rightarrow x' \rightarrow y' \rightarrow y \rightarrow x' \rightarrow y' \rightarrow x$.

set of p internally vertex-disjoint paths joining u and v , the triangle inequality may be violated. For $p \geq 2$, one can easily build a graph G where $d_G^{*p}(u, v)$ and $d_G^{*p}(v, w)$ are finite whereas $d_G^{*p}(u, w)$ is not⁴. The proof that d_G^p satisfies the triangle inequality is given in Proposition 1 (see Section 2.1). Choosing the weight sum as the cost of a set of p edge-disjoint paths follows again the same rationale. d_G^p is the most natural metric generalizing d_G in the context of multipath routing.

1.2 Related Work

The concept of spanner has been mostly studied for the graph distance as introduced by Peleg and Schäffer [24], and generalized to weighted graphs in [3]. There is an abundant literature on graph distance spanners which is surveyed, e.g., by Pettie in [26]. It is well-known that, for each integer $k \geq 1$, every weighted graph with n vertices has an f -spanner of $O(n^{1+1/k})$ edges with stretch function $f(d) = (2k - 1)d$. This can be proved using a greedy construction based on a simple modification of Kruskal’s algorithm⁵, and this size-stretch tradeoff is conjectured to be tight. However, other tradeoffs exist, in particular for unweighted graphs and for stretch functions on the form $f(d) = \alpha d + \beta$. For $\alpha = 1$, the size is $O(n^{3/2})$ with $\beta = 2$ [1], and $O(n^{4/3})$ [4] with $\beta = 6$. There are also constructions for $\alpha = 1 + \varepsilon$ and arbitrary small $\varepsilon > 0$. The term $\beta = \beta(\varepsilon, k)$ depends on ε and k , and the size is $O(\beta n^{1+1/k})$ [11,31]. For $\alpha = O(1)$ and $\beta = \tilde{O}(1)$, spanners of size⁶ $O(n)$ exist [26]. Other stretch functions have been considered, e.g., $f(d) = d + O(d^{1-1/k})$ [26,31]. Distributed algorithms for constructing such spanners have been also developed in [7,8,10,12,27].

The concept of spanner has been extended to some other graph metrics. In weighted directed graphs, the one-way distance is not a graph metric. However, the *roundtrip distance*, defined as the one-way distance from u to v plus the one way distance from v to u , is a non-increasing graph metric. Roundtrip f -spanners of size $O(n^{3/2})$ exist for $f(d) = 3d$ [28], and the size is $\tilde{O}(n^{1+1/k})$ for $f(d) = (2^k - 1)d$ and for every $k > 1$ [6]. It is also proved that no such size-stretch tradeoff can exist if the usual one-way distance in directed graph is considered. Interestingly, these solutions lead to compact routing scheme in directed graphs.

Dragan and Yan [9] study the complexity of computing spanners approximating maximum flow between any two vertices. We observe that the inverse⁷ of the maximum flow is a graph metric (it is even an ultrametric), and thus is captured by our framework.

A concept independent of spanner for a graph metric δ , is the one of fault-tolerant spanner. An f -spanner H is t -*fault-tolerant* if $\delta_{H \setminus F}(u, v) \leq f(\delta_{G \setminus F}(u, v))$ for all vertices u, v and for any set F of at most t faulty vertices and/or edges. Introduced in [20] for the graph distance and for geometric

⁴ E.g., if v is a cut-vertex.

⁵ Visit all the edges of G by increasing order of their weights, and add the edge (x, y) to the current spanner H , initialized to the empty graph, only if $d_H(x, y) > (2k - 1) \cdot d_G(x, y)$.

⁶ Where $\tilde{O}(g(n))$ stands for $g(n) \cdot (\log n)^{O(1)}$.

⁷ The flow from u to u is considered to be ∞ .

graphs, namely the d -dimensional Euclidean complete graph, it has been recently generalized to arbitrary weighted graphs in [5]. Surprisingly, size-stretch tradeoffs are similar to the classic case where no-fault ($t = 0$) are tolerated. Note that t -fault-tolerant spanners preserve $(t+1)$ -connectivity: if there exists $t+1$ disjoint paths in the graph from u to v , then the spanner also contains $t+1$ disjoint paths from u to v . However, the stretch guarantee is different from ours. In particular, we can build examples where the stretch guarantee is low with respect to fault tolerance whereas it is high when considering the multipath graph metric.

1.3 Our Contributions

Our results hold for undirected multi-edge graphs, and for the p -multipath graph metric d^p , for integer $p \geq 1$. Our contributions are the following:

1. We observe (Proposition 2) that every weighted graph has a p -multipath f -spanner of $O(pn^{1+1/k})$ edges, where $f(d) = p(2k-1)d$. This is done by an iterative construction of standard graph distance spanners.
2. The analysis of the stretch can be refined for unweighted graphs, and we show that the previous construction for $p = k = 2$ actually leads to a 2-multipath f -spanner of $O(n^{3/2})$ edges, where $f(d) = 3d$.
3. We also show that all the lower bounds for $p = 1$, i.e., for the standard graph distance, generalize to p -multipath distance for any $p > 1$. In particular, the size-stretch tradeoff of our second result is optimal.
4. Using a quite different approach, we show that 2-multipath f -spanner of size $\Phi \cdot n^{3/2} + n$ edges exists for $f(d) = 2d + 8W$, where W is the largest edge-weight of the graph and $\Phi \approx 1.61$ is the golden ratio.

It may be worth to mention that, as long as δ is a non-increasing graph metric, the greedy Kruskal's algorithm can be naively applied to produce sparse approximate skeletons. It suffices to construct, from G , the weighted complete graph K defined by $V(K) = V(G)$ and the weight $\delta_G(u, v)$ assigned to the edge (u, v) . An f -spanner H of $O(n^{1+1/k})$ edges with $f(d) = (2k-1)d$ can therefore be constructed. Unfortunately, H is not a spanner of the input graph G , it is only a subgraph of K . This general solution might be acceptable for emulator construction [31] where the output graph H is not required to be a subgraph.

A second observation is that, in spite of similarities between roundtrip and 2-multipath distances (in both cases a subgraph realizing the distance between any two vertices indeed consists of a shortest cycle), there is no reduction from 2-multipath to roundtrip spanners⁸.

In the next section we give formal definitions and prove some important basic facts, including simple upper and lower bounds. In Section 3, we present the optimal 2-multipath f -spanner with $O(n^{3/2})$ edges with $f(d) = 3d$. In Section 4, we improve the stretch function to $f(d) = 2d + 8$. We give some open problems in Section 5.

⁸ By simply directing the edges of G and applying an efficient roundtrip spanner to G , we may obtain a roundtrip from u to v using twice the same arc, say $u \rightarrow a \rightarrow b \rightarrow v \rightarrow a \rightarrow b \rightarrow u$, which is not an acceptable solution for a 2-multipath spanner.

2 Preliminaries

In this paper, we consider an undirected multi-edge weighted graph G with weight function ω . The *cost* of any subgraph H of G is the sum of the weights of its edges. It is denoted by $\omega(H) = \sum_{e \in E(H)} \omega(e)$. We set $\omega(H) = 0$ if $E(H) = \emptyset$.

2.1 Multipath Distance and Multipath Spanner

A p -*path* from a vertex u to a vertex v is a subgraph of G composed of p edge-disjoint paths from u to v . We define the p -*multipath distance* between two vertices u and v , denoted by $d_G^p(u, v)$, as the minimum cost of a p -path from u to v . We set $d_G^p(u, v) = \infty$ if there are no p edge-disjoint paths from u to v .

Indeed, d_G^p is a distance. It clearly satisfies $d_G^p(u, v) = 0$ if and only if $u = v$. Symmetry follows from the fact that G is undirected, and the triangle inequality comes from Proposition 1.

Proposition 1. *Let u, v, w be any triple of vertices of a multi-edge graph G . If A is a p -path from u to v , and B a p -path from v to w , then $A \cup B$ contains a p -path from u to w . In particular, $d_G^p(u, w) \leq d_G^p(u, v) + d_G^p(v, w)$.*

Proof. Let (U, W) be a minimum cut between $u \in U$ and $w \in W$ in the graph induced by $H = A \cup B$. Let t be the number of edges with an endpoint in U and the other in W . Consider a maximum flow on H with source u and sink v with unit capacity on each edge. From the min-cut max-flow theorem we derive that there are t edge-disjoint paths from u to w . If $t < p$, we conclude that u and v are both in U as there exists a p -path between them. The same argument can be used to show that $v, w \in W$. This is a contradiction, $U \cap W = \emptyset$. \square

The notions of p -path and p -multipath distance extend the usual notions of path and distance which correspond to the case $p = 1$. We write d_G a short for d_G^1 . We observe that the multipath distance does not extend to a vertex-disjoint version. Indeed, for each $p > 1$, the existence of p vertex-disjoint paths from u to v and of p vertex-disjoint paths from v to w does not imply there are p vertex-disjoint paths from u to w .

A subgraph H of G is a p -*multipath s -spanner* if $d_H^p(u, v) \leq s \cdot d_G^p(u, v)$ for all pairs of vertices u, v . The parameter s is called the p -*multipath stretch* of H . We also use the term *stretch*, instead of multipath stretch, when the context is clear. For $p = 1$, we fall back on the regular definition of s -spanner.

2.2 Iterative Spanners

A p -*iterative s -spanner* of G is a subgraph $H = \bigcup_{i=1}^p H_i$, where H_i is any 1-multipath s -spanner of $G \setminus \bigcup_{j < i} H_j$. We observe that the union of p such 1-multipath spanners is actually a p -multipath spanner.

Proposition 2. *For all integers $k, p \geq 1$, every multi-edge weighted graph with n vertices has a p -multipath $p(2k - 1)$ -spanner with less than $p \cdot n^{1+1/k}$ edges that can be constructed as a p -iterative $(2k - 1)$ -spanner.*

Proof. Let $H = \bigcup_{i=1}^p H_i$ be a p -iterative $(2k - 1)$ -spanner of G , where H_i is a $(2k - 1)$ -spanner of G with less than $n^{1+1/k}$ edges. Each spanner H_i does exist (cf. [3]). Hence, H has less than $p \cdot n^{1+1/k}$ edges.

We now prove that H is a p -multipath $p(2k - 1)$ -spanner. Let u, v be two vertices of G . If there is no p -path from u to v in G , then $d_G^p(u, v) = \infty$. In particular, $d_H^p(u, v) \leq p(2k - 1) \cdot d_G^p(u, v)$. So, we assume there exists a p -path from u to v . Let P be any minimum-cost p -path from u to v in G . We have $\omega(P) = d_G^p(u, v)$. For an edge $e \notin H$, we denote by $H_i(e)$ the simple path which replaces the edge e of G in the i -th spanner member of H . Observe that, for each i , $\omega(H_i(e)) \leq (2k - 1) \cdot \omega(e)$ because $e \in G \setminus H_i$ and H_i has stretch $2k - 1$.

Given P and H , we define the subgraph F as follows:

$$F := (P \cap H) \cup \bigcup_{e \in P \setminus H} \bigcup_{i=1}^p H_i(e).$$

Clearly, $F \subseteq H$, since each edge $e \in P$ is either in H or is replaced by $H_i(e)$ for some i . Moreover, we have $\omega(F) \leq p(2k - 1) \cdot \omega(P)$ because:

$$\begin{aligned} \omega(F) &\leq \omega(P \cap H) + \sum_{e \in P \setminus H} \sum_{i=1}^p \omega(H_i(e)) \\ &\leq \sum_{e \in P \cap H} \omega(e) + \sum_{e \in P \setminus H} p(2k - 1) \cdot \omega(e) \\ &\leq \sum_{e \in P} p(2k - 1) \cdot \omega(e) = p(2k - 1) \cdot \omega(P). \end{aligned}$$

Therefore, the stretch of H is at most $p(2k - 1)$ as claimed.

We now show that F contains a p -path from u to v , and for that we shall use the min-cut max-flow theorem. Consider a cut (X, \overline{X}) with $u \in X$ and $v \in \overline{X}$. Since P is a p -path from u to v , there is a subset C of the cut of at least p edges of P which have one endpoint in X and the other in \overline{X} . Two cases are possible:

1. Every edge of C belongs to F : the cut in F is already at least p .
2. One edge of C does not belong to F : p paths were added in F in replacement for this edge, so the minimum cut is at least p .

Therefore, the minimum cut in F is at least p . By the min-cut max-flow theorem there is p edge-disjoint paths from u to v in F . It follows that F contains a p -path from u to v . This completes the proof. □

The rest of the paper studies how the $p(2k - 1)$ stretch bound can be improved.

2.3 Lower Bounds

For all integers p, n and real $s > 1$, denote by $m_p(n, s)$ the largest integer such that there exists a multi-edge weighted graph with n vertices for which every p -multipath spanner of stretch $< s$ requires $m_p(n, s)$ edges.

The value of $m_p(n, s)$ provides a lower bound on the sparsity of p -multipath spanners of stretch $< s$. To illustrate this, consider for instance $p = 1$ and $s = 3$. It is known that $m_1(n, 3) = \Omega(n^2)$, by considering the complete bipartite graph $B = K_{\lfloor n/2 \rfloor, \lceil n/2 \rceil}$. Since all cycles of B have length at least 4, every proper subgraph H contains two vertices x and y which are neighbors in B but at distance at least 3 in the spanner. Thus H is an s -spanner with $s \geq 3$. In other words, every s -spanner of B , with $s < 3$ contains all the edges of B that is $\Omega(n^2)$ edges.

Unfortunately, this argument does not transfer to p -multipath spanners whenever $p > 1$. Indeed, with the same graph B , we get $d_B^p(x, y) = 1 + 3(p - 1)$. And, if (x, y) is removed from any candidate spanner H , we only get $d_H^p(x, y) = 3p$. Hence, the stretch for H so proved is only $d_H^p(x, y)/d_G^p(x, y) = 1 + O(1/p)$. The argument transfers however if multi-edges are allowed.

Proposition 3. *For all integers $n, p \geq 1$ and real $s > 1$, $m_p(n, s) \geq m_1(n, s)$.*

In particular, under the Erdős-Simonovits [13,14] Conjecture⁹ which implies $m_1(n, 2k + 1) = \Omega(n^{1+1/k})$ for every integer $k \geq 1$ and proved for $k \in \{1, 2, 3, 5\}$, there is a multi-edge unweighted graph with n vertices for which every p -multipath spanner with stretch $< 2k + 1$ has $\Omega(n^{1+1/k})$ edges.

Proof. Let G be an n -vertex graph with the minimum number of edges such that every spanner of stretch $< s$ has $m_1(n, s)$ edges. Let ω be the weight function of G . Clearly, G has $m_1(n, s)$ edges, since otherwise we could remove an edge of G . Observe also that any path between two neighbors x, y of G that does not use the edge (x, y) has length at least s , since otherwise we could remove it from G . In other words, $d_{G \setminus \{(x,y)\}}(x, y) \geq s \cdot \omega(x, y)$.

Let G_p be the graph obtained from G by adding, for each edge of G , $p - 1$ extra multi-edges with same weight. We have $G_1 = G$, and G_p has $p \cdot m_p(n, s)$ edges. Let H be any p -multipath spanner of G_p with $< m_1(n, s)$ edges. There must exist two vertices x, y adjacent in G_p that are not adjacent in H . We have $d_{G_p}^p(x, y) = p \cdot \omega(x, y)$, and $d_H^p(x, y) \geq p \cdot d_{G \setminus \{(x,y)\}}(x, y) \geq p \cdot s \cdot \omega(x, y)$. We conclude that the p -multipath stretch of H is at least $d_{G_p}^p(x, y)/d_H^p(x, y) \geq s$.

In other words, every p -multipath spanner H of G_p with stretch $< s$ has $\geq m_1(n, s)$ edges, proving that $m_p(n, s) \geq m_1(n, s)$. □

We leave open the question of determining whether the same lower bound of $2k - 1$ on the stretch applies if the graphs are restricted to be simple graphs only.

3 An Unweighted 2-Multipath 3-Spanner

In this section, we focus on unweighted 2-multipath 3-spanners. The lower bound of Proposition 3 tells us that $\Theta(n^{3/2})$ is the required size of any 2-multipath 3-spanner. However, the p -iterative $(2k - 1)$ -spanner given by Proposition 2 (with $p = k = 2$) provides a 2-multipath spanner of stretch 6 only. In fact a finer analysis shows that the same construction yields a 2-multipath 3-spanner.

⁹ It states that there are n -vertex graphs with $\Omega(n^{1+1/k})$ edges without cycles of length $\leq 2k$.

Theorem 1. *Every multi-edge unweighted graph with n vertices has a 2-multipath 3-spanner with less than $2n^{3/2}$ edges that can be constructed as a 2-iterative 3-spanner.*

It is obvious from the construction that a 2-iterative 3-spanner contains less than $2n^{3/2}$ edges. For the stretch, the long proof is divided in five lemmatas that are given in the full version of the paper.

4 A 2-Multipath (2,8)-Spanner

In this section, we construct a 2-multipath spanner with $O(n^{3/2})$ edges whose stretch is below 3 for (2-multipath) distances > 8 . In the remaining, (α, β) -spanner stands for f -spanner of stretch function $f(d) = \alpha d + \beta$.

4.1 Multipath Spanning Trees

To prove the main result of this section we extend the notion of spanning tree.

A p -multipath spanning tree of G is a subgraph T of G with a distinguished vertex u , called the *root* of T , such that, for every vertex v of G , T contains a p -path from u to v . Moreover, T is a p -shortest-path spanning tree if $d_T^p(u, v) = d_G^p(u, v)$ for every vertex v . For $p = 1$, we come back to the standard notions of spanning tree and shortest-path spanning tree. Observe that T may not exist, for instance, if G is not 2-edge-connected.

Lemma 1. *Every n -vertex 2-edge-connected graph with a given vertex u has a 2-shortest-path spanning tree rooted at u with at most $2(n-1)$ edges constructible in polynomial time.*

Proof. We use the construction of [29] that can be extended to undirected graphs. The algorithm of [29] constructs 2-paths, each one of minimum cost, from every vertex to a fixed source of the graph. Roughly speaking, the construction results of two shortest-path spanning trees computed with Dijkstra's algorithm. The 2-paths (from every vertex v to the source) are reconstructed via a specific procedure. This latter can be analyzed so that the number of edges used in the 2-multipath tree is at most $2(n-1)$: all vertices, but the source, have two parents. \square

The bound of $2(n-1)$ is tight because of the graph $K_{2, n-2}$. More generally, the number of edges in any p -multipath spanning tree must be, in the worst-case, at least $p(n-p)$, for every $p \leq n/2$. Indeed, every p -multipath spanning tree T must be p -edge-connected¹⁰, and the graph $K_{p, n-p}$ is minimal for the p -edge-connectivity. Therefore, T contains all the edges of $K_{p, n-p}$, and there are $p(n-p)$ edges. Obviously, there are p -multipath spanning tree with less than $p(n-p)$ edges. Typically a subdivision of $K_{2, p}$ with n vertices has p -multipath spanning tree rooted at a degree- p vertex with a total of $n+p-2$ edges.

¹⁰ By Proposition 1, there are two edge-disjoint paths between any two vertices of the p -multipath tree, through its root.

4.2 A Stretch-(2,8W) Spanner

Theorem 2. *Every multi-edge weighted graph with n vertices and largest edge-weight W has a 2-multipath $(2, 8W)$ -spanner with less than $\Phi n^{3/2} + n$ edges, where $\Phi \approx 1.618$ is the golden ratio.*

Proof. Let denote by $B_H^p(u, r) = \{v \in V(H) : d_H^p(u, v) \leq r\}$ the p -multipath ball of radius r in H centered at u , and denote by $N_H^p(u, r)$ the neighbors of u in H that are in $B_H^p(u, r)$. Note that for $p \geq 2$, some neighbor v of u might not be in $B_H^p(u, r)$ for every $r < \infty$: for instance if u and v are not in the same 2-edge-connected component. We denote by $SPT_H^p(u)$ a p -shortest-path tree rooted at u spanning the 2-edge-connected component of H containing u , and having at most $2(|E(H)| - 1)$ edges. According to Lemma 1, such p -shortest path tree can be constructed.

Let G be a multi-edge weighted graph with n vertices and largest edge-weight W . We denote by ω its edge-weight function. The 2-multipath spanner H of G is constructed thanks to the following algorithm (see Algorithm 1).

1. For each edge e of G : if there are in G two other edges between the endpoints of e with weight at most $\omega(e)$, then $G := G \setminus \{e\}$
2. $H := (V(G), \emptyset)$ and $W := \max \{\omega(e) : e \in E(G)\}$
3. While there exists $u \in V(G)$ such that $|N_G^2(u, 4W)| \geq (\sqrt{5} - 1)\sqrt{n}$:
 - (a) $H := H \cup SPT_G^2(u)$
 - (b) $G := G \setminus N_G^2(u, 4W)$
 - (c) $W := \max \{\omega(e) : e \in E(G)\}$
4. $H := H \cup G$

Algorithm 1. A 2-multipath $(2, 8W)$ -spanner algorithm

Size: Denote by G_3 and H_3 respectively the graphs G and H obtained after running the while-loop. Let b be the number of while-loops performed by the algorithm, and let $a = \sqrt{5} - 1$. Observe that $a^2 + 2a = 4$. From Lemma 1, the 2-shortest-path tree $SPT_G^2(u)$ has at most $2(n - 1)$ edges. Hence, the size of H_3 is at most:

$$|E(H_3)| < 2b \cdot n .$$

The number of vertices of G_3 is at most $n - ab\sqrt{n}$, since at each loop, at least $a\sqrt{n}$ vertices are removed from G . Let G_3^1 be the graph induced by all the edges (u, v) of G_3 such that $v \in N_{G_3}^2(u, 4W_1)$, where W_1 is the maximum weight of an edge of the graph obtained after running Instruction 1. Let G_3^2 be the graph induced by the edges of $G_3 \setminus G_3^1$. The degree of each vertex u of G_3^1 is $|N_{G_3}^2(u, 4W_1)| - 1$ which is $< \lceil a\sqrt{n} \rceil - 1 \leq a\sqrt{n}$ because of the while-condition. Therefore, the size of G_3^1 is at most:

$$|E(G_3^1)| \leq \frac{1}{2} \sum_{u \in V(G_3)} a\sqrt{n} < \frac{1}{2} (n - ab\sqrt{n}) \cdot a\sqrt{n} < \frac{a}{2} \cdot n^{3/2} - \frac{a^2b}{2} \cdot n .$$

Let S_3 be the graph obtained from G_3^2 where each multi-edge is replaced by a single unweighted edge. More formally, vertices u and v are adjacent in S_3 if and only if there is at least one edge between u and v in G_3^2 . From Instruction 1, there is at most two edges between two adjacent vertices, so $|E(G_3^2)| \leq 2|E(S_3)|$.

Let us show that S_3 has no cycle of length ≤ 4 . Consider any edge (u, v) of S_3 . Observe that $v \notin N_{G_3^2}^2(u, 4W_3)$, where W_3 is the maximum weight of an edge of G_3 . Assume there is a path cycle of length at most 4 in S_3 going through (u, v) . Then in G_3^2 there is a 2-path from u to v of cost at most $4W_3$. Contradiction: $v \notin N_{G_3^2}^2(u, 4W_3)$ implies $d_{G_3^2}^2(u, v) > 4W_3$.

It has been proved in [2] that every simple η -vertex μ -edge graph without cycle of length $\leq 2k$, must verify the Moore bound:

$$\eta \geq 1 + \delta \sum_{i=0}^{k-1} (\delta - 1)^i > (\delta - 1)^k$$

where $\delta = 2\mu/\eta$ is the average degree of the graph. This implies that $\mu < \frac{1}{2}(\eta^{1+1/k} + \eta)$.

We observe that S_3 is simple. It follows, for $k = 2$ and $\eta \leq n - ab\sqrt{n}$, that the size of G_3^2 is at most (twice the one of S_3):

$$|E(G_3^2)| \leq (n - ab\sqrt{n})^{3/2} + n - ab\sqrt{n} < (n - ab\sqrt{n})\sqrt{n} + n = n^{3/2} + (1 - ab) \cdot n.$$

Overall, the total number of edges of the final spanner H is bounded by:

$$\begin{aligned} |E(H)| &\leq |E(H_3)| + |E(G_3^1)| + |E(G_3^2)| \\ &< \left(1 + \frac{a}{2}\right) \cdot n^{3/2} + \left(2b - \frac{a^2b}{2} + 1 - ab\right) \cdot n \\ &= \left(1 + \frac{a}{2}\right) \cdot n^{3/2} + n = \frac{1 + \sqrt{5}}{2} \cdot n^{3/2} + n = \Phi n^{3/2} + n \end{aligned}$$

because the term $2b - a^2b/2 + 1 - ab = b/2 \cdot (4 - a^2 - 2a) + 1 = 1$. (Recall that, by the choice of a , $a^2 + 2a = 4$.)

Stretch: Let G_0 be the input graph G , before applying the algorithm. We first observe that we can restrict our attention to the stretch analysis of G_1 (instead of G_0), the graph obtained after applying Instruction 1.

Let H be a 2-multipath spanner for G_1 . Consider two vertices u, v of H , and let A be a minimum-cost 2-path between u and v in H . A is composed of two edge-disjoint paths and is of minimum cost in H , so A traverses (at most) two edges with same endpoints having the smallest weight. These (possibly) two edges exist in G_0 and in G_1 , therefore the 2-multipath stretch of H in G_0 or in G_1 is the same.

From the above observation, it suffices to prove that H is a 2-multipath $(2, 8W_1)$ -spanner of G_1 , where $W_1 \leq W_0$ is the maximum weight of an edge of G_1 .

Let x, y be any two vertices of G_1 , and A be a minimum-cost 2-path between x and y in G_1 . Let $d = d_{G_1}^2(x, y) = \omega(A)$. If all the edges of A are in H , then

$d_H^2(x, y) = d_{G_1}^2(x, y) = d$, and the stretch is $(1, 0)$. So, assume that $A \not\subset H$. Let u be the first vertex selected in the while-loop such that $N_G^2(u, 4W)$ intersects A , so that Instruction 3(b) removes at least one edge of A . Let G, H be the graphs at the time u is selected, but before running Instruction 3(a) and 3(b). Let $v \in N_G^2(u, 4W) \cap A$, and B a minimum-cost 2-path from u and v in G . By definition of $N_G^2(u, 4W)$, $d_G^2(u, v) = \omega(B) \leq 4W$. Let $T = \text{SPT}_G^2(u)$.

An important observation is that u, x, y are in the same 2-edge-connected component of G . This comes from the fact that every 2-path is a 2-edge-connected subgraph¹¹. So, A and B are 2-edge-connected, and $A \cup B$ as well, since A intersects B (in v).

Using the triangle inequality (Proposition 1) between x and y in H , we have $d_H^2(x, y) \leq d_H^2(u, x) + d_H^2(u, y)$. By construction of H and T , $d_H^2(u, x) = d_T^2(u, x) = d_G^2(u, x) \leq \omega(A \cup B)$ since we have seen that $u, x \in A \cup B$ that is 2-edge-connected. Thus, $d_H^2(u, x) \leq \omega(A) + \omega(B) \leq d + 4W_1$. Similarly, $d_H^2(u, y) \leq d + 4W_1$. Therefore, $d_H^2(x, y) \leq 2d + 4W_1$. The subgraph H is a 2-multipath $(2, 8W_1)$ -spanner, completing the proof. \square

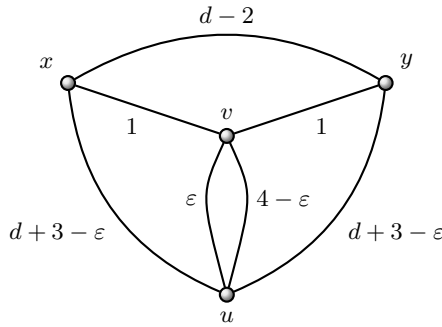


Fig. 1. A weighted graph G with $d_G^2(x, y) = d$ showing that the stretch analysis in the proof of Theorem 2 is tight. The 2-shortest-path tree rooted at u spans all the edges but (x, y) . We have $d_T^2(u, x) = d_T^2(u, y) = d + 4$, and $d_T^2(x, y) = 2d + 8 - 2\varepsilon$.

5 Conclusion

We have introduced multipath spanners, some subgraphs that approximate the cost of p edge-disjoint paths between any two vertices of a graph. The usual notion of spanner is obtained for $p = 1$. This new notion leaves open several questions. We propose some of them:

- Is it true that every weighted graph has a p -multipath $(2k - 1)$ -spanner with $O(pn^{1+1/k})$ edges?

¹¹ This observation becomes wrong whenever p -paths with $p > 2$ are considered.

- Let $s < 2k + 1$. Does the bound $\Omega(n^{1+1/k})$ on the size of any p -multipath s -spanner hold for the class of n -vertex simple graphs (with no multi-edges)?
- Let $\varepsilon \in (0, 1]$. Is there a 2-multipath $(2 - \varepsilon, O(W))$ -spanner with $o(n^2)$ edges for every graph of largest edge-weight W ? and with $O(n^{3/2})$ edges? or even $O(n^{4/3})$ edges? And for $p > 2$?
- Prove, for $p > 2$, that every p -edge-connected graph has a p -shortest-path spanning tree with at most $p(n - 1)$ edges.

References

1. Aingworth, D., Chekuri, C., Indyk, P., Motwani, R.: Fast estimation of diameter and shortest paths (without matrix multiplication). *SIAM J. on Computing* 28, 1167–1181 (1999)
2. Alon, N., Hoory, S., Linial, N.: The Moore bound for irregular graphs. *Graphs and Combinatorics* 18, 53–57 (2002)
3. Althöfer, I., Das, G., Dobkin, D., Joseph, D.A., Soares, J.: On sparse spanners of weighted graphs. *Discrete & Computational Geometry* 9, 81–100 (1993)
4. Baswana, S., Kavitha, T., Mehlhorn, K., Pettie, S.: New constructions of (α, β) -spanners and purely additive spanners. In: 16th Symposium on Discrete Algorithms (SODA), January 2005, pp. 672–681. ACM-SIAM (2005)
5. Chechik, S., Langberg, M., Peleg, D., Roditty, L.: Fault-tolerant spanners for general graphs. In: 41st Annual ACM Symposium on Theory of Computing (STOC), May 2009, pp. 435–444. ACM Press, New York (2009)
6. Cowen, L.J., Wagner, C.: Compact roundtrip routing in directed networks. In: 19th Annual ACM Symposium on Principles of Distributed Computing (PODC), July 2000, pp. 51–59. ACM Press, New York (2000)
7. Derbel, B., Gavoille, C., Peleg, D., Viennot, L.: On the locality of distributed sparse spanner construction. In: 27th Annual ACM Symposium on Principles of Distributed Computing (PODC), August 2008, pp. 273–282. ACM Press, New York (2008)
8. Derbel, B., Gavoille, C., Peleg, D., Viennot, L.: Local computation of nearly additive spanners. In: Keidar, I. (ed.) DISC 2009. LNCS, vol. 5805, pp. 176–190. Springer, Heidelberg (2009)
9. Dragan, F.F., Yan, C.: Network flow spanners. In: Correa, J.R., Hevia, A., Kiwi, M. (eds.) LATIN 2006. LNCS, vol. 3887, pp. 410–422. Springer, Heidelberg (2006)
10. Elkin, M.: Computing almost shortest paths. *ACM Transactions on Algorithms* 1, 283–323 (2005)
11. Elkin, M., Peleg, D.: $(1 + \epsilon, \beta)$ -spanner constructions for general graphs. *SIAM J. on Computing* 33, 608–631 (2004)
12. Elkin, M., Zhang, J.: Efficient algorithms for constructing $(1 + \epsilon, \beta)$ -spanners in the distributed and streaming models. *Distributed Computing* 18, 375–385 (2006)
13. Erdős, P.: Extremal problems in graph theory. In: *Publ. House Czechoslovak Acad. Sci., Prague*, pp. 29–36 (1964)
14. Erdős, P., Simonovits, M.: Compactness results in extremal graph theory. *Combinatorica* 2, 275–288 (1982)
15. Gallager, R.G.: A minimum delay routing algorithm using distributed computation. *IEEE Transactions on Communications* (1977)
16. Jacquet, P., Viennot, L.: Remote spanners: what to know beyond neighbors. In: 23rd IEEE International Parallel & Distributed Processing Symposium (IPDPS), May 2009. IEEE Computer Society Press, Los Alamitos (2009)

17. Kleinberg, J.: Approximation algorithms for disjoint paths problems, PhD thesis, Massachusetts Institute of Technology (1996)
18. Kushman, N., Kandula, S., Katabi, D., Maggs, B.M.: R-bgp: Staying connected in a connected world. In: 4th Symposium on Networked Systems Design and Implementation, NSDI (2007)
19. Lee, S., Gerla, M.: Split multipath routing with maximally disjoint paths in ad hoc networks. In: IEEE International Conference on Communications (ICC), vol. 10, pp. 3201–3205 (2001)
20. Levkopoulos, C., Narasimhan, G., Smid, M.: Efficient algorithms for constructing fault-tolerant geometric spanners. In: 30th Annual ACM Symposium on Theory of Computing (STOC), May 1998, pp. 186–195. ACM Press, New York (1998)
21. Mueller, S., Tsang, R.P., Ghosal, D.: Multipath routing in mobile ad hoc networks: Issues and challenges. In: Calzarossa, M.C., Gelenbe, E. (eds.) MASCOTS 2003. LNCS, vol. 2965, pp. 209–234. Springer, Heidelberg (2004)
22. Nasipuri, A., Castañeda, R., Das, S.R.: Performance of multipath routing for on-demand protocols in mobile ad hoc networks. *Mobile Networks and Applications* 6, 339–349 (2001)
23. Pan, P., Swallow, G., Atlas, A.: Fast Reroute Extensions to RSVP-TE for LSP Tunnels. RFC 4090 (Proposed Standard) (2005)
24. Peleg, D., Schäffer, A.A.: Graph spanners. *J. of Graph Theory* 13, 99–116 (1989)
25. Peleg, D., Ullman, J.D.: An optimal synchronizer for the hypercube. *SIAM J. on Computing* 18, 740–747 (1989)
26. Pettie, S.: Low distortion spanners. In: Arge, L., Cachin, C., Jurdziński, T., Tarlecki, A. (eds.) ICALP 2007. LNCS, vol. 4596, pp. 78–89. Springer, Heidelberg (2007)
27. Pettie, S.: Distributed algorithms for ultrasparse spanners and linear size skeletons. In: 27th Annual ACM Symposium on Principles of Distributed Computing (PODC), August 2008, pp. 253–262. ACM Press, New York (2008)
28. Roditty, L., Thorup, M., Zwick, U.: Roundtrip spanners and roundtrip routing in directed graphs. *ACM Transactions on Algorithms* 3, 29 (2008)
29. Suurballe, J.W., Tarjan, R.E.: A quick method for finding shortest pairs of disjoint paths. *Networks* 14, 325–336 (1984)
30. Thorup, M., Zwick, U.: Approximate distance oracles. *J. of the ACM* 52, 1–24 (2005)
31. Thorup, M., Zwick, U.: Spanners and emulators with sublinear distance errors. In: 17th Symposium on Discrete Algorithms (SODA), January 2006, pp. 802–809. ACM-SIAM (2006)
32. Vutukury, S., Garcia-Luna-Aceves, J.J.: A simple approximation to minimum-delay routing. In: SIGCOMM, pp. 227–238 (1999)